


# 2050-50

## ODOR CONTROL SYSTEMS

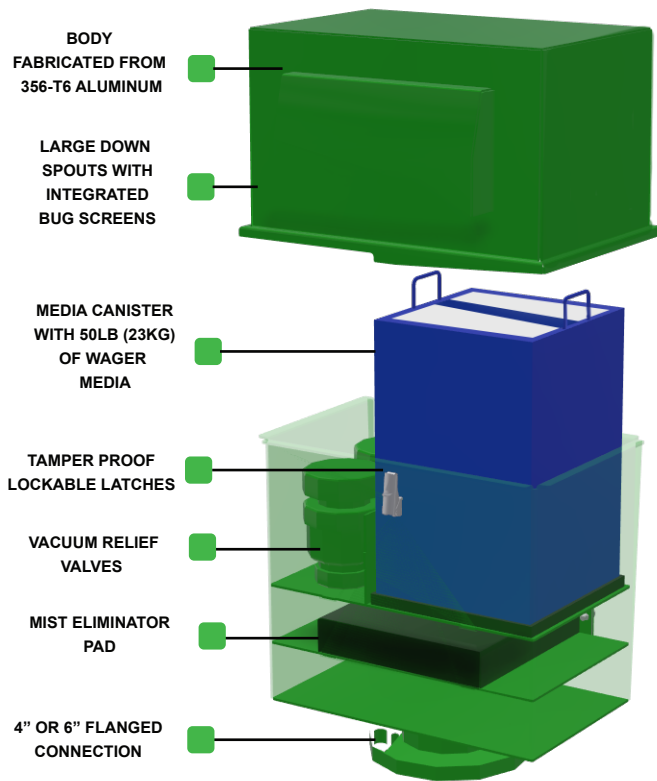

The 2050 odor control sewer valve is an elongated vertical design to accommodate a deodorizing feature that helps to suppress sewer gas odors. Perfect for residential or commercial locations where complaints regarding odor have become an issue.

The 2050 is constructed from aluminum, and is epoxy coated grass green so that it fits nicely into the surrounding environment. H<sub>2</sub>S gas is directed thru a canister containing 50 lbs (23kg, 1.5 cu.ft) of highly effective odor controlling media. The media is an engineered product, designed to chemically absorb the H<sub>2</sub>S gas and change it to a non-toxic compound. Also included are two (2) vacuum relief valves. A mist eliminator is incorporated into the unit to prevent moisture from damaging the media bed.

The 2050 has been successfully used on gravity lines, forced mains, and air release valves. It's attractive appearance allows for installations in both residential and commercial sites. Every unit is equipped with tamper proof lockable latches



2050-50

Robert H. Wager Company, Inc. • 570 Montroyal Road • Rural Hall, NC 27045  
WATTS (US) 1-800-562-7024 • Phone: (336) 969-6909  
[www.wagerusa.com](http://www.wagerusa.com)



# 2050-50

## TECHNICAL SPECIFICATIONS

### SPECIFICATIONS

4-2050  
FAPC-IWS

&

6-2050  
FAPC-IWS

MEDIA CAPACITY  
Est. 50 LBS. (23kg)


1  
CANISTER

2  
VACUUM BREAKERS

1  
MIST PADS

EST CFM.  
60-75

Months Between Changeouts For The 2050-50 Odor Control System

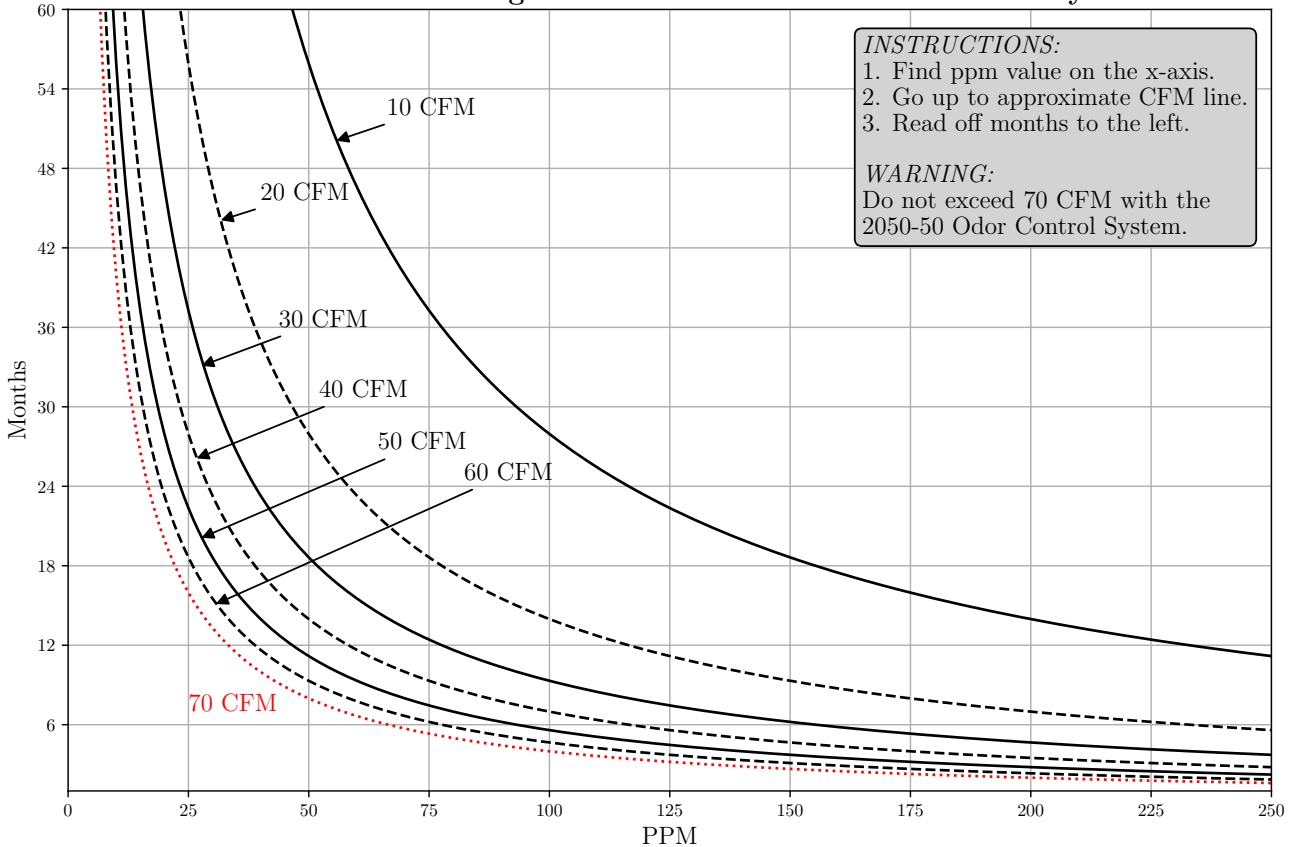

2050-50 Pressure Drop Measurement, 4" Flange, 0.12 sq ft Piping

